

FORM PTO-1700 (REV. 11-2000)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER 20496-303
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371			U.S. APPLICATION NO. (If known, see 37 CFR 1.5 09/936381
INTERNATIONAL APPLICATION NO. PCT/EP00/01575	INTERNATIONAL FILING DATE 24 February 2000	PRIORITY DATE CLAIMED 13 March 1999	
TITLE OF INVENTION METHOD FOR PRODUCING HOT STRIP			
APPLICANT(S) FOR DO/EO/US Rudolf KAWALLA, et al.			
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:			
<p>1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.</p> <p>2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.</p> <p>3. <input type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.</p> <p>4. <input type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31).</p> <p>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))</p> <p>a. <input checked="" type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau).</p> <p>b. <input checked="" type="checkbox"/> has been communicated by the International Bureau.</p> <p>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</p> <p>6. <input checked="" type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).</p> <p>a. <input checked="" type="checkbox"/> is attached hereto.</p> <p>b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4).</p> <p>7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))</p> <p>a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau).</p> <p>b. <input type="checkbox"/> have been communicated by the International Bureau.</p> <p>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</p> <p>d. <input type="checkbox"/> have not been made and will not be made.</p> <p>8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).</p> <p>9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</p> <p>10. <input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</p> <p>Items 11 to 20 below concern document(s) or information included:</p> <p>11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</p> <p>12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</p> <p>13. <input checked="" type="checkbox"/> A FIRST preliminary amendment.</p> <p>14. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.</p> <p>15. <input type="checkbox"/> A substitute specification.</p> <p>16. <input type="checkbox"/> A change of power of attorney and/or address letter.</p> <p>17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.</p> <p>18. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4).</p> <p>19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).</p> <p>20. <input checked="" type="checkbox"/> Other items or information:</p> <p>Amended claims in response to EPO written decision of October 11, 2000 International Preliminary Examination Report (in German) International Search Report (German and English) Express Mail Mailing Label No. EL070211602US</p>			

FORM PTO-1390 (REV 11-2000) page 2 of 2

09/936381
JOSS RECEIVED TO 10 SEP 2001

Attorney Docket No. : 20496-303

IN THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US)

Applicant	:	Rudolf KAWALLA
Int'l Appl. No.	:	PCT/EP00/01517
Int'l. Filing Date	:	February 24, 2000
Priority Date	:	March 13, 1999
Title of the Invention	:	METHOD FOR PRODUCING HOT STRIP

**PRELIMINARY
AMENDMENT**

Assistant Commissioner for Patents
Box PCT
Washington, DC 20231

Express Mail Mailing Label No. :

EL070211602US

Sir:

Prior to examination, please amend the above-identified patent application as follows:

IN THE SPECIFICATION:

Page 1, after the title, please insert --BACKGROUND OF THE INVENTION--.

Page 2, before the paragraph which begins with "It is thus the object," please insert --SUMMARY OF THE INVENTION--.

Page 8, before the fifth paragraph, which begins with "Below, the invention," please insert -- BRIEF DESCRIPTION OF THE DRAWINGS--.

Page 9, before the paragraph, which begins with "The line 1," please insert -- DETAILED DESCRIPTION OF THE INVENTION--.

IN THE CLAIMS:

Please consider the claims as they were amended in the Amendment according to article 34 EPC dated March 12, 2001, a copy of which is enclosed. In addition, please amend claims 5, 10, and 12-14 of the amended claims to remove their multiple dependencies. A "marked-up" version of the amended claims is enclosed herewith in accordance with 37 C.F.R. 1.121 (c)(1). A clean version of all pending claims is also enclosed with this Amendment, for Examiner's convenience, in accordance with 37 C.F.R. 1.121(c)(3).

--5. (Amended) A method according to claim 1, characterized in that the steel comprises (in mass %)

C: 0.25 – 1.05 %;

Si: ≤ 0.25 %;

Mn: ≤ 0.6 %;

–in that the hot strip (W) after finish rolling in the first cooling phase (t_{CK}) of accelerated cooling starting from a temperature above 800 °C, is cooled to a temperature of between 530 and 620 °C;

–in that the hot strip (W) in the second cooling phase (t_{LK}) of accelerated cooling is cooled to a temperature of less than 500 °C; and

–in that the hot strip (W) is subsequently coiled.

--10. (Amended) A method according to claim 1, characterized in that between the first cooling phase (t_{CK}) of accelerated cooling and the second cooling phase (t_{LK}) of accelerated cooling the hot strip (W) passes through an intermediate cooling phase (t_{PAUSE}) during which the hot strip (W) is subjected to cooling by exposure to air.

--12. (Amended) A method according to claim 1, characterized in that the first cooling phase (t_{CK}) of accelerated cooling starts at the latest two seconds after the last pass of finish rolling.

--13. (Amended) A method according claim 1, characterized in that at least one of the passes during finish rolling is carried out in the austenitic range below a temperature of $Ar3 + 80\text{ }^{\circ}\text{C}$, and in that an overall pass reduction during finish rolling exceeding 30 % is achieved..

--14. (Amended) A method according to claim 1, characterized in that in the second cooling phase (t_{LK}) of accelerated cooling the hot strip (W) is cooled at a cooling rate of at least $30\text{ }^{\circ}\text{C/s}$.

IN THE ABSTRACT:

Please delete last line which starts with "Fig. 2 has been provided."

REMARKS

Amendments are being made to claims 5, 10 and 12-14 to remove their multiple dependencies.


Please proceed to examine the application as amended herein.

Respectfully submitted,
PROSKAUER ROSE LLP
Attorneys for Applicant(s)

Date: September 10, 2001

PROSKAUER ROSE LLP
1585 Broadway
New York, NY 10036

Tel: (212) 969-3000

By 
Charles Guttman
Reg. No. 29,161

amend

CLAIMS

1. A method for producing a hot strip (W) which strip is produced in particular from continuous casting in the shape of reheated slabs or slabs obtained directly from the casting heat, from thin slabs or cast strip, based on a steel comprising (in mass %)

C: 0.001 - 1.05 %;

Si: ≤ 1.5 %;

Mn: 0.05 - 3.5 %;

Al: ≤ 2.5 %;

as well as optionally one or several of the following constituents

- Cu, Ni, Mo with an amount of ≤ 0.8 %;
- N, Ti, Nb, V, Zn, B with an amount of ≤ 0.5 %;
- P with an amount of ≤ 0.09 %;
- Cr with an amount of ≤ 1.5 %; and / or
- S with an amount of ≤ 0.02 %;

and

the remainder being iron as well as the usual accompanying elements,

with the steel also optionally having been treated in the liquid phase with Ca or Ca carrier alloys,

involving the following steps:

- continuous finish rolling of the hot strip (W);

- continuous cooling of the hot strip (W) in at least two subsequent cooling phases (t_{CK} , t_{LK}) of accelerated cooling, to a final temperature;
 - with the first cooling phase (t_{CK}) of accelerated cooling starting at the latest three seconds after the last pass of finish rolling; and
 - with the hot strip (W) during the first cooling phase (t_{CK}) of accelerated cooling being cooled at a cooling rate of at least 250 °C/s.
2. A method according to claim 1, characterised in that the steel comprises 0.005 to 0.4 mass % of silicon.
3. A method according to claim 1, characterised in that
- the steel comprises (in mass %)
- | | |
|-----|------------------|
| C: | $\leq 0.07 \%$; |
| Si: | $\leq 0.2 \%$; |
| Mn: | $\leq 0.6 \%$; |
| Al: | $\leq 0.08 \%$; |
- in that the hot strip (W) during finish rolling is rolled in the austenitic area;
 - in that the hot strip (W) in the first cooling phase (t_{CK}) of accelerated cooling starting at a temperature above 850 °C is cooled to a temperature of 680 to 750 °C;

- in that the hot strip (W) in the second cooling phase (t_{LK}) of accelerated cooling is cooled to a temperature of less than 600 °C; and
- in that the hot strip (W) is subsequently coiled.

4. A method according to claim 1, characterised in that the steel (in mass %) comprises

C: 0.04 - 0.09 %;
Si: ≤ 0.2 %;
Mn: 0.5 - 2.0 %;
P: 0.02 - 0.09 %;
Cr: ≤ 0.9 %;

- in that the hot strip (W) after finish rolling in the first cooling phase (t_{CK}) of accelerated cooling starting from a temperature above 800 °C, is cooled to a temperature of 650 to 730 °C;
- in that in the second cooling phase (t_{LK}) of accelerated cooling, the hot strip (W) is cooled to less than 500 °C; and
- in that the hot strip (W) is subsequently coiled.

5. A method according to one of claims 1, characterised in that the steel comprises (in mass %)

C: 0.25 - 1.05 %;
Si: ≤ 0.25 %;
Mn: ≤ 0.6 %;

- in that the hot strip (W) after finish rolling in the first cooling phase (t_{CK}) of accelerated cooling starting from a temperature above 800 °C, is cooled to a temperature of between 530 and 620 °C;
- in that the hot strip (W) in the second cooling phase (t_{LK}) of accelerated cooling is cooled to a temperature of less than 500 °C; and
- in that the hot strip (W) is subsequently coiled.

6. A method according to claim 1, characterised in that the steel comprises (in mass %)

C: 0.12 - 0.3 %;
Mn: 1.2 - 3.5 %;
Al: 1.1 - 2.2 %;

- in that the hot strip (W) after finish rolling in the first cooling phase (t_{CK}) of accelerated cooling starting from a temperature between the Ar_3 temperature and a temperature of $Ar_3 + 150$ °C, is cooled to a temperature which is up to 50 °C below the Ar_3 temperature;
- in that the hot strip (W) in the second cooling phase (t_{LK}) of accelerated cooling is cooled to 350 to 550 °C; and
- in that the hot strip (W) is subsequently coiled.

7. A method according to claim 1, characterised in that the steel comprises (in mass %)

C: 0.04 - 0.09 %;
Si: 0.5 - 1.5 %;
Mn: 0.5 - 2.0 %;
Al: 0.4 - 2.5 %;
P: ≤ 0.09 %;
Cr: ≤ 0.9 %;

- in that the hot strip (W) after finish rolling in the first cooling phase (t_{CK}) of accelerated cooling starting from a temperature above 800 °C, is cooled to a temperature of 650 to 730 °C;
- in that the hot strip (W) in the second cooling phase (t_{LK}) of accelerated cooling is cooled to less than 500 °C; and
- in that the hot strip (W) is subsequently coiled.

8. A method according to claim 1, characterised in that the steel comprises (in mass %)

C: 0.07 - 0.22 %;
Si: 0.1 - 0.45 %;
Mn: 0.2 - 1.5 %;

- in that the hot strip (W) after finish rolling in the first cooling phase (t_{CK}) of accelerated cooling starting from a temperature above 800 °C, is cooled to a temperature of 650 to 730 °C;
- in that the hot strip (W) in the second cooling phase (t_{LK}) of accelerated cooling is cooled to less than 500 °C; and

- in that the hot strip (W) is subsequently coiled.

9. A method according to claim 1, characterised in that the steel comprises (in mass %)

C: 0.07 - 0.22 %;

Si: 0.1 - 0.45 %;

Mn: 0.2 - 1.5 %;

- in that the hot strip (W) after finish rolling in the first cooling phase (t_{CK}) of accelerated cooling starting from a temperature above 800 °C, is cooled to a temperature of 580 to 650 °C;

- in that the hot strip (W) in the second cooling phase (t_{LK}) of accelerated cooling is cooled to less than 500 °C; and

- in that the hot strip (W) is subsequently coiled.

10. A method according to one of the preceding claims, characterised in that between the first cooling phase (t_{CK}) of accelerated cooling and the second cooling phase (t_{LK}) of accelerated cooling the hot strip (W) passes through an intermediate cooling phase (t_{PAUSE}) during which the hot strip (W) is subjected to cooling by exposure to air.

11. A method according to claim 10, characterised in that the intermediate cooling phase (t_{PAUSE}) lasts for at least one second.

12. A method according to one of the preceding claims, characterised in that the first cooling phase (t_{CK})

of accelerated cooling starts at the latest two seconds after the last pass of finish rolling.

13. A method according to one of the preceding claims, characterised in that at least one of the passes during finish rolling is carried out in the austenitic range below a temperature of $Ar_3 + 80\text{ }^{\circ}\text{C}$, and in that an overall pass reduction during finish rolling exceeding 30 % is achieved.
14. A method according to one of the preceding claims, characterised in that in the second cooling phase (t_{LK}) of accelerated cooling the hot strip (W) is cooled at a cooling rate of at least $30\text{ }^{\circ}\text{C/s}$.

Amended Claims - Marked-Up Version

--5. (Amended) A method according to [one of claims 1] claim 1, characterized in that the steel comprises (in mass %)

C: 0.25 – 1.05 %;

Si: ≤ 0.25 %;

Mn: ≤ 0.6 %;

–in that the hot strip (W) after finish rolling in the first cooling phase (t_{CK}) of accelerated cooling starting from a temperature above 800 °C, is cooled to a temperature of between 530 and 620 °C;

–in that the hot strip (W) in the second cooling phase (t_{LK}) of accelerated cooling is cooled to a temperature of less than 500 °C; and

–in that the hot strip (W) is subsequently coiled.

--10. (Amended) A method according to [one of the preceding claims] claim 1, characterized in that between the first cooling phase (t_{CK}) of accelerated cooling and the second cooling phase (t_{LK}) of accelerated cooling the hot strip (W) passes through an intermediate cooling phase (t_{PAUSE}) during which the hot strip (W) is subjected to cooling by exposure to air.

--12. (Amended) A method according to [one of the preceding claims] claim 1, characterized in that the first cooling phase (t_{CK}) of accelerated cooling starts at the latest two seconds after the last pass of finish rolling.

--13. (Amended) A method according [one of the preceding claims] claim 1, characterized in that at least one of the passes during finish rolling is carried out in the austenitic range below a temperature of $Ar3 + 80\text{ }^{\circ}\text{C}$, and in that an overall pass reduction during finish rolling exceeding 30 % is achieved..

--14. (Amended) A method according to [one of the preceding claims] claim 1, characterized in that in the second cooling phase (t_{LK}) of accelerated cooling the hot strip (W) is cooled at a cooling rate of at least $30\text{ }^{\circ}\text{C/s}$.

09936381.122101

PENDING CLAIMS

1. A method for producing a hot strip (W) which strip is produced in particular from continuous casting in the shape of reheated slabs or slabs obtained directly from the casting heat, from thin slabs or cast strip, based on a steel comprising (in mass %)

C: 0.001 – 1.05 %;

Si: ≤ 1.5 %;

Mn: 0.05 – 3.5 %;

Al: ≤ 2.5%;

as well as optionally one or several of the following constituents

- Cu, Ni, Mo with an amount of ≤ 0.8 %;
- N, Ti, Nb, V, Zn, B with an amount of ≤ 0.5 %;
- P with an amount of ≤ 0.09 %;
- Cr with an amount of ≤ 1.5 %; and /or
- S with an amount of ≤ 0.02%;

and

the remainder being iron as well as the usual accompanying elements,

with the steel also optionally having been treated in the liquid phase with Ca or Ca carrier alloys,

involving the following steps:

- continuous finish rolling of the hot strip (W);
- continuous cooling of the hot strip (W) in at least two subsequent cooling phases (t_{CK} , t_{LK}) of accelerated cooling, to a final temperature;

- with the first cooling phase of (t_{CK}) of accelerated cooling starting at the latest three seconds after the last pass of finish rolling; and
- with the hot strip (W) during the first cooling phase (t_{CK}) of accelerated cooling rate of at least 250 °C/s.
2. A method according to claim 1, characterized in that the steel comprises 0.005 to 0.4 mass % of silicon.
3. A method according to claim 1, characterized in that
- the steel comprises (in mass %)
 - C: $\leq 0.07 \%$;
 - Si: $\leq 0.2\%$;
 - Mn: $\leq 0.6 \%$;
 - Al: $\leq 0.08\%$;
 - in that the hot strip (W) during finish rolling is rolled in the austenitic area;
 - in that the hot strip (W) in the first cooling phase (t_{CK}) of accelerated cooling starting at a temperature above 850 °C is cooled to a temperature of 680 to 750 °C;
 - in that the hot strip (W) in the second cooling phase (t_{LK}) of accelerated cooling is cooled to a temperature of less than 600 °C; and
 - in that the hot strip (W) is subsequently coiled.
4. A method according to claim 1, characterized in that the steel (in mass %) comprises
- C: 0.04 – 0.09 %;
 - Si: $\leq 0.2 \%$;
 - Mn: 0.5 – 2.0 %;
 - P: 0.02 – 0.09 %;
 - Cr: $\leq 0.9 \%$.

- in that the hot strip (W) after finish rolling in the first cooling phase (t_{CK}) of accelerated cooling starting from a temperature of about 800 °C, is cooled to a temperature of 650 to 730 °C;
- in that in the second cooling phase (t_{LK}) of accelerated cooling, the hot strip (W) is cooled to less than 500 °C; and
- in that the hot strip (W) is subsequently coiled.

5. A method according to claim 1, characterized in that the steel comprises (in mass %)

C: 0.25 – 1.05 %;

Si: \leq 0.25 %;

Mn: \leq 0.6 %;

- in that the hot strip (W) after finish rolling in the first cooling phase (t_{CK}) of accelerated cooling starting from a temperature of about 800 °C, is cooled to a temperature of between 530 and 620 °C;
- in that the hot strip (W) in the second cooling phase (t_{LK}) of accelerated cooling is cooled to less than 500 °C; and
- in that the hot strip (W) is subsequently coiled.

6. A method according to claim 1, characterized in that the steel comprises (in mass %)

C: 0.12 – 0.3 %;

Mn: 1.2 \leq 3.5 %;

Al: 1.1 \leq 2.2 %;

- in that the hot strip (W) after finish rolling in the first cooling phase (t_{CK}) of accelerated cooling starting from a temperature between the Ar_3 temperature and a temperature of $Ar_3 + 150$ °C, is cooled to a temperature which is up to 50 °C below the Ar_3 temperature;

- in that the hot strip (W) in the second cooling phase (t_{LK}) of accelerated cooling is cooled to 350 to 550 °C; and
- in that the hot strip (W) is subsequently coiled.

7. A method according to claim 1, characterized in that the steel comprises (in mass %)

C: 0.04 – 0.09 %;

Si: 0.5 – 1.5 %;

Mn: 0.5 – 2.0 %;

Al: 0.4 – 2.5 %;

P: ≤ 0.09 %;

Cr: ≤ 0.9 %.

- in that the hot strip (W) after finish rolling in the first cooling phase (t_{CK}) of accelerated cooling starting from a temperature above 800 °C, is cooled to a temperature of between 650 and 730 °C;
- in that the hot strip (W) in the second cooling phase (t_{LK}) of accelerated cooling is cooled to a temperature of less than 500 °C; and
- in that the hot strip (W) is subsequently coiled.

8. A method according to claim 1, characterized in that the steel comprises (in mass %)

C: 0.07 % – 0.22 %;

Si: 0.1 – 0.45 %

Mn: 0.2 % – 1.5 %;

- in that the hot strip (W) after finish rolling in the first cooling phase (t_{CK}) of accelerated cooling starting from a temperature above 800 °C, is cooled to a temperature of between 650 and 730 °C;
- in that the hot strip (W) in the second cooling phase (t_{LK}) of accelerated cooling is cooled to a temperature of less than 500 °C; and

- in that the hot strip (W) is subsequently coiled.
9. A method according to claim 1, characterized in that the steel comprises (in mass %)
- C: 0.07 % – 0.22 %;
- Si: 0.1 – 0.45 %
- Mn: 0.2 % – 1.5 %;
- in that the hot strip (W) after finish rolling in the first cooling phase (t_{CK}) of accelerated cooling starting from a temperature above 800 °C, is cooled to a temperature of between 580 and 650 °C;
- in that the hot strip (W) in the second cooling phase (t_{LK}) of accelerated cooling is cooled to a temperature of less than 500 °C; and
- in that the hot strip (W) is subsequently coiled.
10. A method according to claim 1, characterized in that between the first cooling phase (t_{CK}) of accelerated cooling and the second cooling phase (t_{LK}) of accelerated cooling the hot strip (W) passes through an intermediate cooling phase (t_{PAUSE}) during which the hot strip (W) is subjected to cooling by exposure to air.
11. A method according to claim 10, characterized in that the intermediate cooling phase (t_{PAUSE}) lasts for at least one second.
12. A method according to claim 1, characterized in that the first cooling phase (t_{CK}) of accelerated cooling starts at the latest two seconds after the last pass of finish rolling.
13. A method according to claim 1, characterized in that at least one of the passes during finish rolling is carried out in the austenitic range below a temperature of $Ar_3 + 80$ °C, and in that an overall pass reduction during finish rolling exceeding 30% is achieved.
14. A method according to claim 1, characterized in that in the second cooling phase (t_{LK}) of accelerated cooling the hot strip (W) is cooled at a cooling rate of at least 30 °C/s.

METHOD FOR PRODUCING HOT STRIP

The invention relates to a method for producing a hot strip steel in which following finish rolling, the hot strip is subjected to a cooling process carried out in several stages.

Cooling of a hot strip following finish rolling, which normally takes place in several passes, is very important as far as the characteristic properties of the materials of the strip are concerned. Among other things, the application of suitable cooling makes it possible to influence the microstructure itself, as well as the individual types of structure which make up this microstructure. It is thus possible for example, by way of the cooling process, to influence the strength, toughness and hardness of a hot strip.

The article "Hot rolled coils for special applications", A. De Vito et al., BTF - special issue 1986, pages 137-141, describes various studies which document the influence which cooling has on the production of hot strip. These studies show that it is for example advantageous in the production of a dual-phase hot strip steel (DP hot strip steel) to carry out the cooling process which follows finish rolling, in three stages. In the first and last of these three stages, the strip passes through conventional laminar cooling sections, arranged so as to be spaced apart from each other, whereby coolant is sprayed onto the strip in the form of a multitude of "veils", one arranged behind the other in the direction of conveyance of the strip. The cooling

09/936381-1001

rate achieved in this process is approx. 70 °C/s in the first cooling stage. Cooling of the strip in the third stage takes place more slowly than in the first stage.

In the intermediate stage which is passed between the laminar cooling sections, in the known method, cooling takes place by exposure to air, whereby again the cooling rate achieved in this stage is far below that of the last stage of the cooling process.

It has been shown that using the previously explained, known method, DP hot strip steels can be produced which do not contain molybdenum, with said DP steels comprising distinct martensite and ferrite constituents. The respective hot strip steels are of increased strength and toughness.

At the same time however, a decrease in ductility has to be accepted. Furthermore, it has become evident that the improvements which can be achieved with the known method are not sufficient to meet the requirements prescribed of hot strip produced in this way, in particular they do not meet hardness requirements.

It is thus the object of the invention to provide a method for producing hot strip of very considerable forming ability and increased strength.

According to the invention this object is met by a method for producing a hot strip which is produced in particular from continuous casting in the shape of reheated slabs or slabs obtained directly from the casting heat, from thin slabs or cast strip, based on a steel comprising (in mass %) 0.001 - 1.05 % C, \leq 1.5 % Si, 0.05 - 3.5 % Mn, \leq

09944.1334

2.5 % Al, if necessary further elements such as Cu, Ni, Mo, N, Ti, Nb, V, Zn, B, P, Cr, Ca and/or S, with the remainder being iron as well as the usual accompanying elements, involving the following steps:

- continuous finish rolling of the hot strip;
- continuous cooling of the hot strip, in at least two subsequent cooling phases of accelerated cooling, to a final temperature;
- with the first cooling phase of accelerated cooling starting at the latest three seconds after the last pass of finish rolling; and
- with the hot strip during the first cooling phase of accelerated cooling being cooled at a cooling rate of at least 150 °C/s.

According to the invention, cooling of the hot strip also takes place in at least two subsequently passed stages. In the first cooling phase the hot strip is cooled significantly faster than is the case with the state of the art. This compact cooling during the first cooling phase causes the γ/α transformation of the strip which was hot rolled in the γ area, in an effective and targeted way, to be suppressed towards lower temperatures. The strip is then cooled to the desired final temperature in the subsequently passed second cooling phase of accelerated cooling. In this cooling phase the hardness-increasing secondary phases of the hot strip microstructure, such as martensite, bainite and residual austenite, cease. (The final temperature reached at the end of the second cooling phase of accelerated cooling,

Depending on the desired characteristic properties of the materials, the steel used in the production of the hot strip can optionally comprise additional elements. If such elements are present, the constituents (in mass %) of Cu, Ni, Mo should not exceed 0.8 %, that of N, Ti, Nb, V, Zn, B should not exceed 0.5 %, that of P should not exceed 0.09 %, that of Cr should not exceed 1.5 % and that of S should not exceed 0.02 %.

The method according to the invention is suitable for producing hot strip produced on the basis of steels with low carbon content. Thus an advantageous variant of the method according to the invention is characterised in that the steel (in mass %) comprises no more than 0.07 % C, no more than 0.2 % Si, no more than 0.6 % Mn and no more than 0.08 % Al; in that the hot strip during finish rolling is rolled in the austenitic area; in that the hot strip in the first cooling phase of accelerated cooling, starting at a temperature above 850 °C, is cooled to a temperature of 680 to 750 °C; in that the hot strip in the second cooling phase of accelerated cooling is cooled to a temperature of less than 600 °C and is subsequently coiled.

The method according to the invention is also suitable for producing DP hot strip steels. A respective

embodiment of the method according to the invention is characterised in that the steel (in mass %) comprises 0.04 - 0.09 % C, no more than 0.2 % Si, 0.5 - 2.0 % Mn, 0.02 - 0.09 % P and no more than 0.9 % Cr, and in that the hot strip after finish rolling in the first cooling phase of accelerated cooling starting from a temperature above 800 °C, is cooled to a temperature of 650 to 730 °C; in that the hot strip in the second cooling phase of accelerated cooling is cooled to less than 500 °C; and in that the hot strip is subsequently coiled.

In the case of steels with increased carbon constituents too, improvements in the characteristic properties of the materials can be achieved with the approach according to the invention. Thus according to a further embodiment of the invention a hot strip based on a steel with (in mass %) 0.25 - 1.05 % C, no more than 0.25 % Si and no more than 0.6 % Mn, after finish rolling in the first cooling phase of accelerated cooling starting from a temperature above 800 °C, is cooled to a temperature of between 530 and 620 °C; in the second cooling phase of accelerated cooling said steel is cooled to less than 500 °C and is subsequently coiled. A hot strip produced in this way also has improved hardness and better forming characteristics when compared to conventionally produced strip.

In the case of a TRIP hot strip containing aluminium which (in mass %) comprises 0.12 - 0.3 % C, 1.2 - 3.5 % Mn and 1.1 - 2.2 % Al and in the manner according to the invention after finish rolling in the first cooling phase starting from a temperature between the Ar_3 temperature and a temperature of $Ar_3 + 150$ °C, is cooled to a temperature which is up to 50 °C below the Ar_3

093333 133333

A further advantageous variant of the method according to the invention is characterised in that the steel (in mass %) comprises 0.04 - 0.09 % C, 0.5 - 1.5 % Si, 0.5 - 2.0 % Mn, 0.4 - 2.5 % Al, no more than 0.09 % P as well as no more than 0.9 % Cr; in that the hot strip after finish rolling in the first cooling phase of accelerated cooling starting from a temperature above 800 °C is cooled to a temperature of 650 to 730 °C; in that the hot strip in the second cooling phase of accelerated cooling is cooled to less than 500 °C and that the hot strip is subsequently coiled. Such a hot strip has DP and TRIP characteristics.

A structural steel with an increased ferrite constituent and resulting particularly good formability, can be produced in that the steel (in mass %) comprises 0.07 - 0.22 % C, 0.1 - 0.45 % Si as well as 0.2 - 1.5 % Mn; in that the hot strip after finish rolling in the first cooling phase of accelerated cooling starting from a temperature above 800 °C is cooled to a temperature of 650 to 730 °C; in that the hot strip in the second cooling phase of accelerated cooling is cooled to less than 500 °C; and in that the hot strip is subsequently coiled. With the same steel composition a hot strip with improved hardness compared to the above strip can be achieved in that the hot strip after finish rolling in the first cooling phase of accelerated cooling starting from a temperature above 800 °C is cooled to a temperature of 580 to 650 °C; in that the hot strip in

the second cooling phase of accelerated cooling is cooled to less than 500 °C; and in that the hot strip is subsequently coiled. With a reduced ferrite constituent, the hot strip cooled in this way has increased bainite and martensite constituents.

According to an advantageous embodiment of the invention, between the first cooling phase and the second cooling phase of accelerated cooling, the hot strip passes through an intermediate cooling phase during which the hot strip is subjected to cooling by exposure to air. This intermediate cooling phase should last for at least one second. During the intermediate cooling phase which follows the first phase of compact (i.e. highly accelerated) cooling, in which intermediate cooling phase cooling as a result of exposure to air results, the austenite to ferrite transformation takes place faster and reaches a greater extent than is the case in the state of the art. At the same time a very substantial grain refining effect can be observed.

Surprisingly it has been found that the approach according to the invention makes it possible to produce a hot strip of increased hardness and of closer-grained microstructure, when compared to a hot strip of the same composition produced in the conventional method in two laminar cooling stages with interposed cooling as a result of exposure to air. At the same time, the strip produced according to the method according to the invention is of high strength and, unlike strips produced according to the known method, has good formability.

In order to safely suppress the γ/α transformation until lower temperatures have been reached, the phase of

compact cooling should take place at the highest possible cooling rates and as far as possible immediately following the last pass of finish rolling. According to a preferred embodiment of the invention, the first cooling phase thus starts at the latest two seconds after the last pass of finish rolling, with the cooling rate in the first cooling phase being at least 250 °C/s.

A further advantageous embodiment of the invention with which a hot strip of particularly good formability can be produced, is characterised in that at least one of the passes during finish rolling is carried out in the austenitic range below a temperature of $A_{r3} + 80$ °C, and in that the overall pass reduction during finish rolling exceeds 30 %.

Depending on the nature and composition of the steel used for producing the hot strip, it is advantageous if the steel, which in particular is fed to the respective mill train in the shape of thin-slab raw material, in the liquid phase has been treated with Ca or Ca carrier alloys.

Depending on the respective desired work result, it can finally be advantageous if the hot strip in the second cooling phase is cooled at a cooling rate of at least 30 °C/s.

Below, the invention is explained in more detail with reference to a drawing which shows one embodiment. The following are diagrammatically shown:

Fig. 1 a lateral view of the end section comprising a cooling section, of a line for producing hot strip;

Fig. 2 a diagram showing the temperature gradient during cooling within the cooling section; and

Fig. 3 a diagram showing the transformed constituents of a steel used in the production of a hot strip, with temperatures of the conventional processing method and temperatures of the processing method according to the invention being shown.

The line 1 for producing a hot strip W comprises a group of stands incorporating several finishing stands of which only the last stand 2 is shown in the diagram. In the finishing roll line, the hot strip W is rolled to its desired final thickness.

A short distance behind the last finishing stand 2, a compact cooling device 3 is arranged. This compact cooling device 3 comprises nozzles (not shown) which convey coolant, preferably water, at pressure onto the top and bottom of the hot strip W. The volume flow of the coolant can be adjusted such that within the compact cooling device 3, cooling rates of 150 °C/s to 1000 °C/s can be achieved.

In the direction of conveyance F of the hot strip W, at a distance to the compact cooling device 3, a second cooling device 4 is arranged. The second cooling device 4 operates in the manner of a conventional laminar cooling device, with the coolant being applied in a fan-shape to the hot strip W by means of several nozzles (not shown)

arranged one behind the other, in the direction of conveyance F. The number of the nozzles in operation and/or the volume flow of the coolant delivered in the region of the laminar cooling device 4 can be regulated such that in the region of the laminar cooling device 4 cooling rates of 30 to 150 °C/s can be achieved.

A coiling device 5 in which the hot strip W is coiled is arranged behind the laminar cooling device 4 in the direction of conveyance F of the strip.

A hot strip W, for example produced from a multiphase steel is rolled in the finishing roll line exclusively in the austenitic area at an overall pass reduction exceeding 30 %. If necessary, the hot strip W is subjected to thermo-mechanical treatment during rolling.

After the hot strip W has left the last stand 2 of the finishing roll line, within a transfer phase t_z lasting less than two seconds, said strip moves to the compact cooling device 3. As the hot strip W enters the compact cooling device 3, in a first cooling phase t_{ck} it is continually subjected to a compact cooling process during which the hot strip W is cooled from an entry temperature ET_{ck} to an exit temperature AT_{ck} . The cooling rates achieved during this process range between 250 and 1000 °C/s. As a result of the increased cooling of the hot strip W in the compact cooling device 3 taking place within a short time t_z after exiting from the finishing roll line, the γ/α transformation of the hot strip steel is suppressed.

Subsequently, the hot strip W passes through a free section in which in an intermediate cooling phase t_{PAUSE} it

099634.189650
F0121T

is cooled by exposure to air. The cooling phase t_{PAUSE} lasts for at least one second. During this time, partial transformation of the hot strip steel takes place.

Subsequently the hot strip W reaches the laminar cooling device 4 where in a second cooling phase t_{LK} it is cooled from an entry temperature ET_{LK} to an exit temperature AT_{LK} . The cooling rate set for this ranges between 30 and 150 °C/s. Depending on the respective chemical composition of the steel and the selected cooling rate, secondary phases (bainite, martensite or residual austenite) are formed which have an influence on the characteristic properties of the hot strip W. The precipitation condition of the hot strip W, too, is controlled in this way.

Finally, the hot strip W cooled in this way is coiled in the coiling device 5.

Table 1 shows a comparison of the microstructure constituents and the hardness between hot strip produced from steels "Steel 1" - "Steel 2" produced according to the method according to the invention, as explained above; and hot strip of the same composition produced in the conventional way in two laminar cooling devices with interposed cooling as a result of exposure to air.

TO T A T T T B E E E E E E E E

INVENTION				STATE OF THE ART	
1st cooling phase: compact cooling, cooling rate > 250 °C/s				1st cooling phase: laminar cooling, cooling rate 30 - 150 °C/s	
2nd cooling phase: cooling by exposure to air				2nd cooling phase: cooling by exposure to air	
3rd cooling phase: Laminar cooling, cooling rate 30 - 150 °C/s				3rd cooling phase: Laminar cooling, cooling rate 30 - 150 °C/s	
Steel	Type of structure	Content in %	Hardness HV10	Content in %	Hardness HV10
Steel 1	Ferrite	10	292	Traces	256
	Pearlite	-		-	
	Bainite	40		60	
	Martensite	50		40	
Steel 2	Ferrite	25	259	≤ 5	236
	Pearlite	-		-	
	Bainite	25		95	
	Martensite	50		-	

Table 1

Table 2 shows the compositions of the steels "Steel 1" and "Steel 2"

	C	Mn	P	S	Si	Cu	Al	N	Cr	Ni	Ti	Nb
Steel 1	0.15	1.38	0.009	0.007	0.42	0.01	0.026	0.0041	0.02	0.02	0.02	0.018
Steel 2	0.13	1.45	0.012	0.004	0.35	0.14	0.037	0.0064	0.04	0.16		0.034

Table 2

In relation to Steel 1, the solid line in Fig. 3 shows the gradient CLK of the microstructural transformation which occurs if a hot strip, according to the invention, first for a period t_{ck} passes through a compact cooling process at a cooling rate of 250 °C/s, followed by an

intermediate cooling phase t_{PAUSE} and then followed by a laminar cooling process lasting for a period t_{LK} . By way of comparison, the dashed line shows the gradient LLK of the microstructural transformation which occurs with a conventional combination of two laminar cooling processes with interposed cooling by exposure to air.

The above shows clearly that as a result of the superposed compact cooling process, the constituent of hard phases, i.e. phases which transform at low temperatures, increases. Thus, in the sequence according to the invention, of compact cooling / air cooling / laminar cooling, the transformed constituent UA of the austenite at a temperature of 450 °C only amounts to approx. 60 %. Transformation of the remaining constituents of the austenite occurs to a larger extent at temperatures below 400 °C, being completed only at a temperature of 320 °C. By contrast, the transformed constituent UA in the case of the conventional laminar cooling / air cooling laminar cooling at 400 °C has already reached almost 90 %, with transformation of the still remaining austenite already being completed at 350 °C.

Table 1 confirms the statement of Fig. 3. With each of the hot strips examined, the application of the method according to the invention has achieved a shift in the microstructure constituents in favour of the harder martensitic phases, when compared to conventionally cooled strip. With identical composition, this results in a clear increase in the hardness of the respective hot strip.

At the same time the structure of the specimens produced according to the invention reveals a closer grain than that of the specimens produced according to the conventional method. Consequently, despite the increased amounts of hard phases, the formability of hot strip produced according to the invention is good. This was also confirmed in the case of a TRIP steel comprising ((in mass %) C: 0.2 %, Al: 1.8 % Mn: 1.6 %). When produced in the conventional way, the median ferrite grain diameter of such a steel was 6 - 7 μm . In the process according to the invention, this diameter is reduced to less than 3 μm .

05936381 43404

F	Direction of conveyance;
W	Hot strip;
1	Line for producing a hot strip;
2	Finishing stand;
3	Compact cooling device;
4	Laminar cooling device;
5	Coiling device;
t_z	Transfer phase between the exit from the finishing stand 2 and commencement of compact cooling;
t_{CK}	First cooling phase, time required by the hot strip W to travel the length of the compact cooling device 3;
ET_{CK}	Entry temperature of the hot strip W when entering the compact cooling device 3;
AT_{CK}	Exit temperature of the hot strip W when leaving the compact cooling device 3;
t_{PAUSE}	Intermediate cooling phase during which the hot strip W is cooled by exposure to air;
t_{LK}	Second cooling phase in which the hot strip W is cooled in the laminar cooling device 4;
ET_{LK}	Entry temperature of the hot strip W during entry to the laminar cooling device 4;
AT_{LK}	Exit temperature of the hot strip W when leaving the laminar cooling device 4;
CLK	Gradient of the microstructural transformation which occurs when a hot strip first passes through compact cooling, followed by laminar cooling;
LLK	Gradient L_{LK} of the microstructural transformation which occurs when two laminar cooling processes are combined; and
UA	Respective transformed austenite constituent.

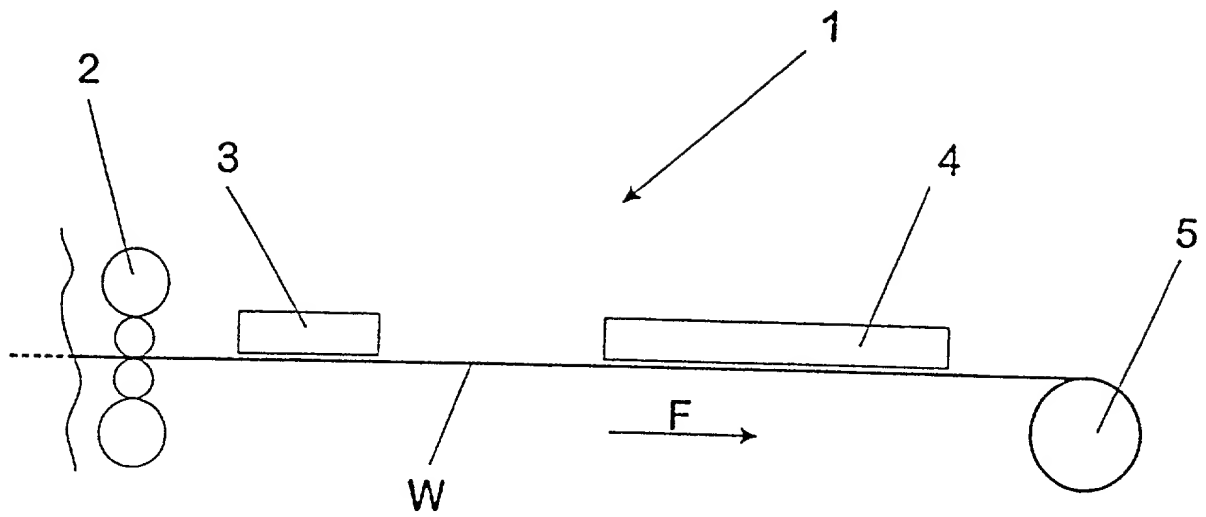


Fig. 1

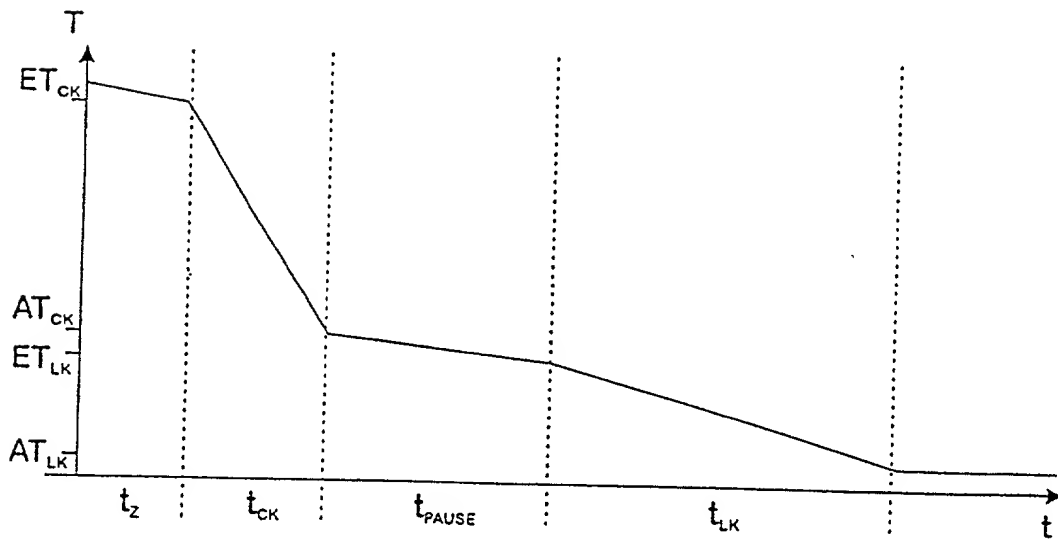


Fig. 2

DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD FOR PRODUCING HOT STRIP

the specification of which is attached hereto unless the following box is checked:

X was filed on February 24, 2000 as United States Application Number _____
or PCT International Application Number PCT/EP00/01517
and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified, by checking the box, any foreign application for patent or inventor's certificate, or PCT International Application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

199 11 287.8
(Number)

Germany
(Country)

13/3/1999
(Day/Month/Year Filed)

(Number)

(Country)

(Day/Month/Year Filed)

Attorney Docket No.: 20496-303

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

 (Application Number)

 (Filing Date)

 (Application Number)

 (Filing Date)

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

 (Application Number)

 (Filing Date)

 (Status--patented,
pending, abandoned)

 (Application Number)

 (Filing Date)

 (Status--patented,
pending, abandoned)

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Charles Guttman, Reg. No. 29,161;
 Kenneth Rubenstein, Reg. No. 30,586;
 Evan L. Kahn, Reg. No. 35,912;
 Anthony C. Coles, Reg. No. 34,139;
 Gregg I. Goldman, Reg. No. 38,896;
 Rachel S. Watt, Patent Agent, Reg. No. 46,186;
 Manuel C. Nelson, Reg. No. 44,969;
 Tzvi Hirshaut, Reg. No. 38,732; and
 Mitul Desai, Reg. No. 46,661.

Address all telephone calls to Charles Guttman at telephone number: (212) 969-3000

Address all correspondence to Proskauer Rose LLP

1585 Broadway

New York, New York 10036

09936381 123101

Attorney Docket No.: 20496-303

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1-00

Full name of the first or sole inventor (given name, family name): <u>Rudolf KAWALLA</u>	
Inventor's signature: > <i>R. Kawalla</i>	Date: > 23.10.2001
Residence: <u>Bobritzsch, Germany</u> DEX	Citizenship: Germany
Post Office Address: Pfarrgasse 3 c, D - 09627, Bobritzsch, Germany	

2-00

Full name of the first or sole inventor (given name, family name): <u>Hans PIRCHER</u>	
Inventor's signature: > <i>H. Pircher</i>	Date: > 29.10.2001
Residence: <u>Mülheim, Germany</u> DEX	Citizenship: Germany
Post Office Address: Elsenborner Weg 39, D - 45481, Mülheim, Germany	


3-00

Full name of the first or sole inventor (given name, family name): <u>Thomas HELLER</u>	
Inventor's signature: > <i>T. Heller</i>	Date: > 12.11.01
Residence: <u>Duisburg, Germany</u> DEX	Citizenship: Germany
Post Office Address: Elsterweg 8, D - 47229, Duisburg, Germany	


09336301 12101

Attorney Docket No.: 20496-303


4-00

Full name of the first or sole inventor (given name, family name): <u>Bernhard ENGL</u>	
Inventor's signature: > 	Date: > 9.11.01
Residence: <u>Dortmund, Germany</u> DEX	Citizenship: Germany
Post Office Address: Fuchsweg 7, D - 44267, Dortmund, Germany	

05333331-123101

Full name of the first or sole inventor (given name, family name): <u>Pino TESI</u>	
Inventor's signature: > 	Date: > 06.12.2001
Residence: <u>Oberhausen, Germany</u> DEX	Citizenship: Germany
Post Office Address: Ernastrasse 23, D - 46045, Oberhausen, Germany	

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division

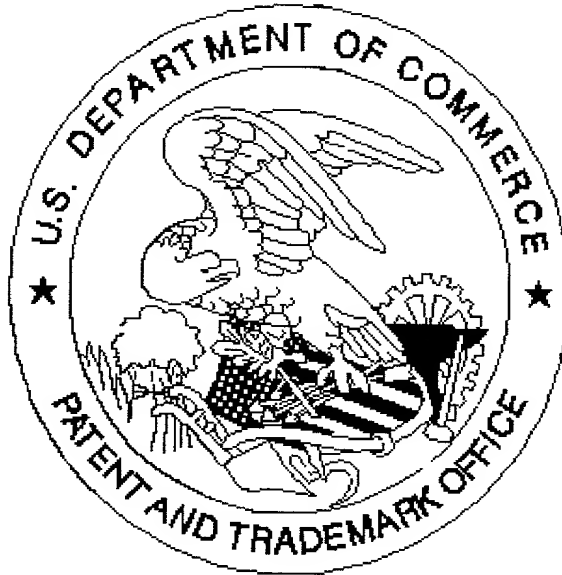

Application deficiencies found during scanning:

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☐ Page(s) _____ of _____ were not
present
for scanning. (Document title)

There is only one page of drawing.

☐ *Scanned copy is best available.*

TOLEET THE 92660